

General Description


These N-Channel enhancement mode power field effect transistors are using SGT technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

Features

V_{DS}	65V
I_D (at $V_{GS}=10V$)	110A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	2.8m Ω (Typ)

100% UIS TESTED!
100% ΔV_{ds} TESTED!

PDFN5*6



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	65	V
Gate-Source Voltage		V_{GS}	+20/-12	V
Drain Current-Continuous	TC=25°C	I_D	110	A
	TC=100°C	I_D	70	A
Drain Current – Pulsed		I_{DM}	440	A
Maximum Power Dissipation		P_D	138	W
Single pulse avalanche energy ⁽¹⁾		E_{AS}	420	mJ
Junction and Storage Temperature Range		T_J, T_{STG}	-55 To 150	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Unit
Thermal Resistance junction-case	$R_{\theta Jc}$		0.45	°C /W
Thermal Resistance junction-to-Ambient	$R_{\theta JA}$		62	°C /W

Electrical Characteristics (TJ=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V I _D =250μA	65			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =65V,V _{GS} =0V			1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =20V,V _{DS} =0V			100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ,I _D =250μA	1.0	1.5	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =20A		2.8	3.5	mΩ
		V _{GS} =4.5V, I _D =10A		4.6	6.0	mΩ
gfs	Forward Transconductance	V _{DS} =10V , I _D =3A		12		S
DYNAMIC PARAMETERS						
C _{iss}	Input Capacitance	V _{DS} =25V,V _{GS} =0V , F=1.0MHz		3590		pF
C _{oss}	Output Capacitance			1130		pF
C _{rss}	Reverse Transfer Capacitance			30		pF
SWITCHING PARAMETERS						
t _{d(on)}	Turn-on Delay Time	V _{DD} =30V,I _D =1A, V _{GS} =10V, R _G =6Ω		15.5		nS
t _r	Turn-on Rise Time			15.8		nS
t _{d(off)}	Turn-Off Delay Time			45		nS
t _f	Turn-Off Fall Time			58		nS
Q _g	Total Gate Charge	V _{DS} =48V,I _D =5A, V _{GS} =10V		64		nC
Q _{gs}	Gate-Source Charge			5.6		nC
Q _{gd}	Gate-Drain Charge			29		nC
V _{SD}	Diode Forward Voltage	V _{GS} =0V,I _{SD} =10A		0.72	1.4	V
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz		1.5		Ω

Note:

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{DD}=30V, V_{GS}=10V, L=0.5mH, I_{AS}=42A$, Starting TJ=25°C
3. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

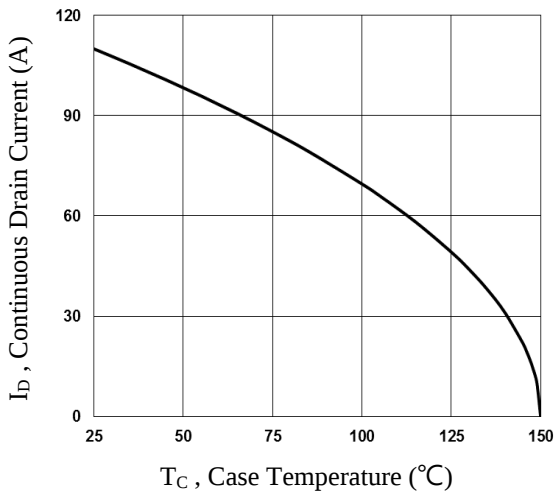


Fig.1 Continuous Drain Current vs. T_c

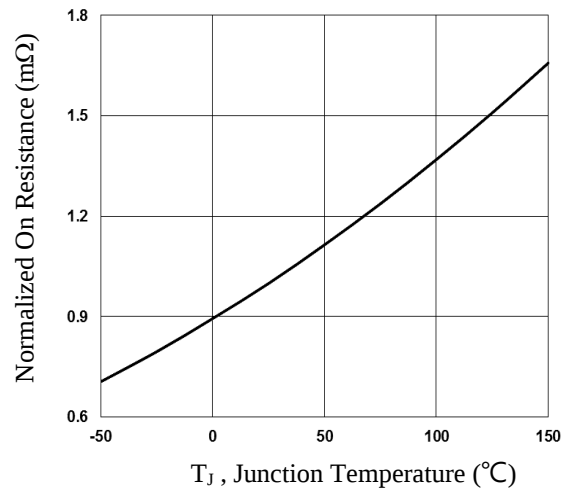


Fig.2 Normalized $R_{DS(on)}$ vs. T_j

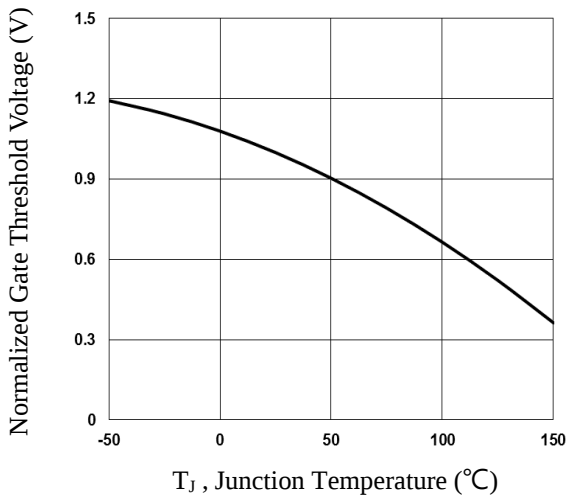


Fig.3 Normalized V_{th} vs. T_j

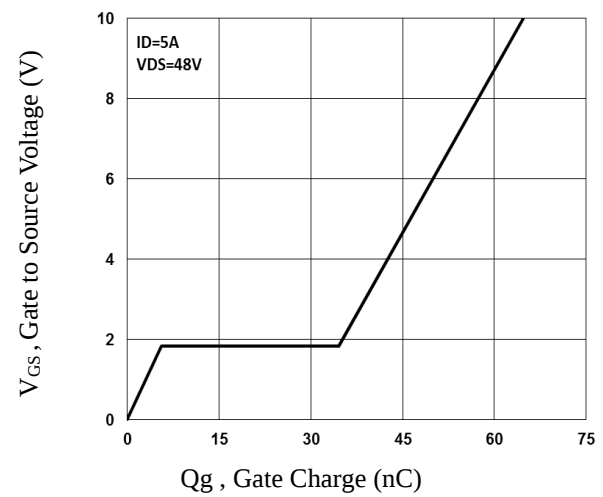


Fig.4 Gate Charge Characteristics

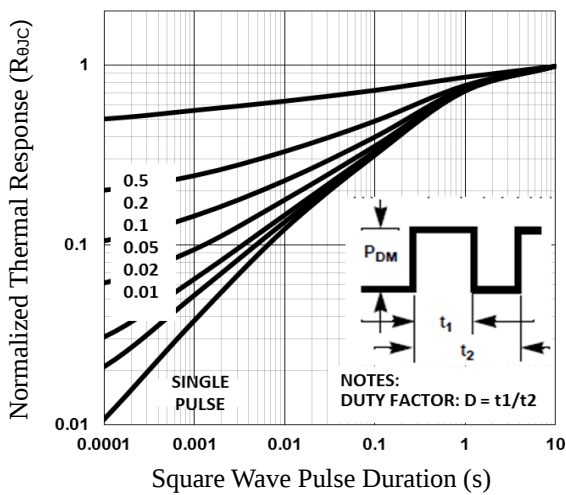


Fig.5 Normalized Transient Impedance

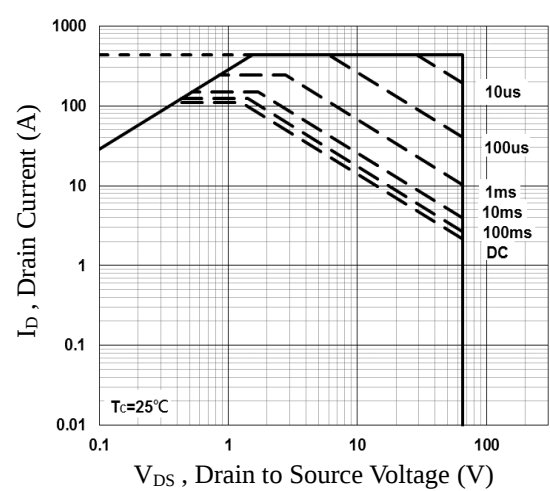


Fig.6 Maximum Safe Operation Area

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

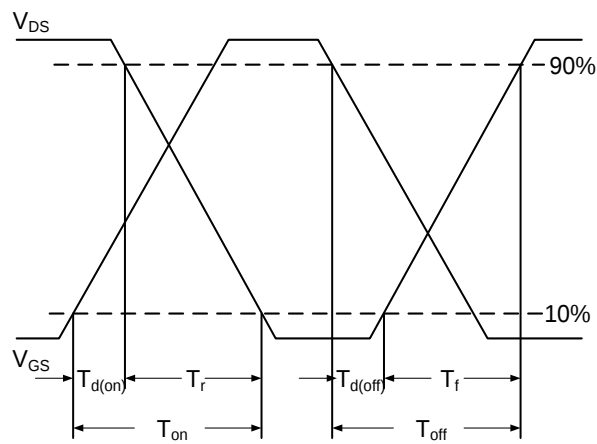


Fig.7 Switching Time Waveform


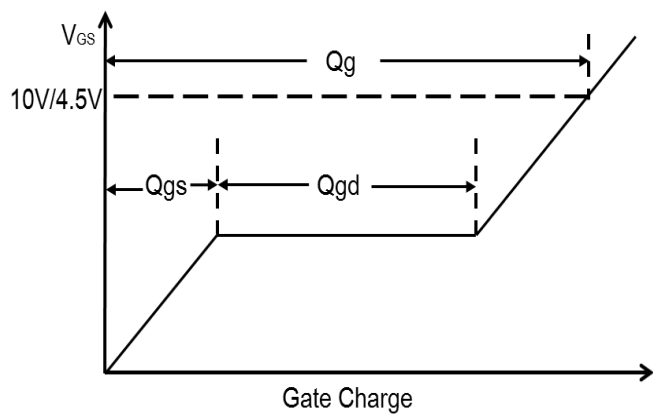


Fig.8 Gate Charge Waveform

PDFN5*6 PACKAGE INFORMATION

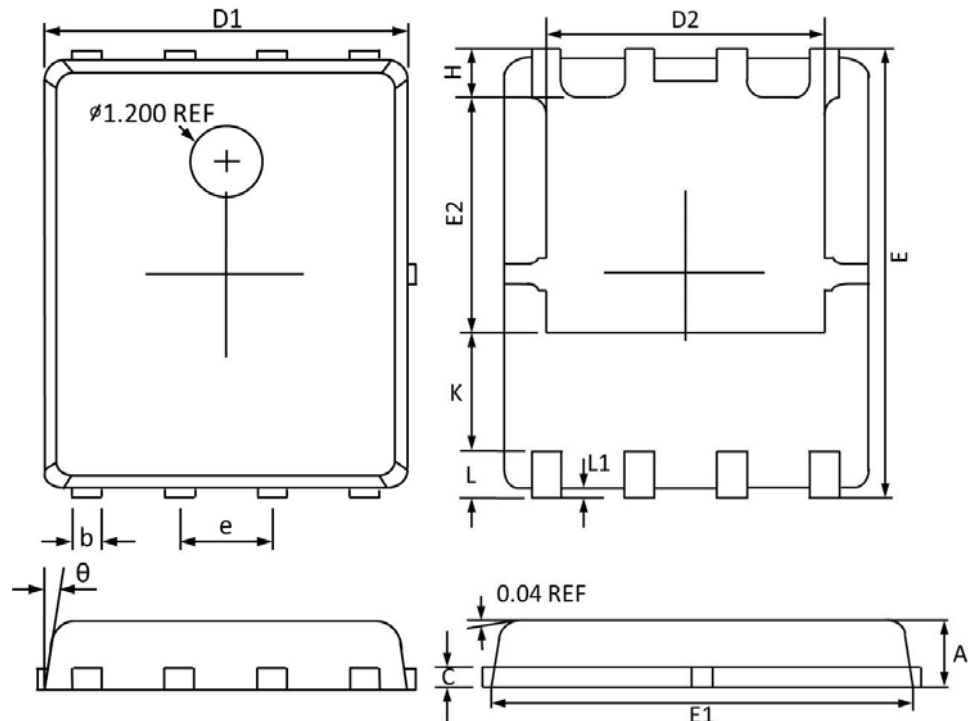

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.100	0.800	0.043	0.031
b	0.510	0.330	0.020	0.013
C	0.300	0.200	0.012	0.008
D1	5.100	4.800	0.201	0.189
D2	4.100	3.610	0.161	0.142
E	6.200	5.900	0.244	0.232
E1	5.900	5.700	0.232	0.224
E2	3.780	3.350	0.149	0.132
e	1.27BSC		0.05BSC	
H	0.700	0.410	0.028	0.016
K	1.500	1.100	0.059	0.043
L	0.710	0.510	0.028	0.020
L1	0.200	0.060	0.008	0.002
θ	12°	0°	12°	0°